


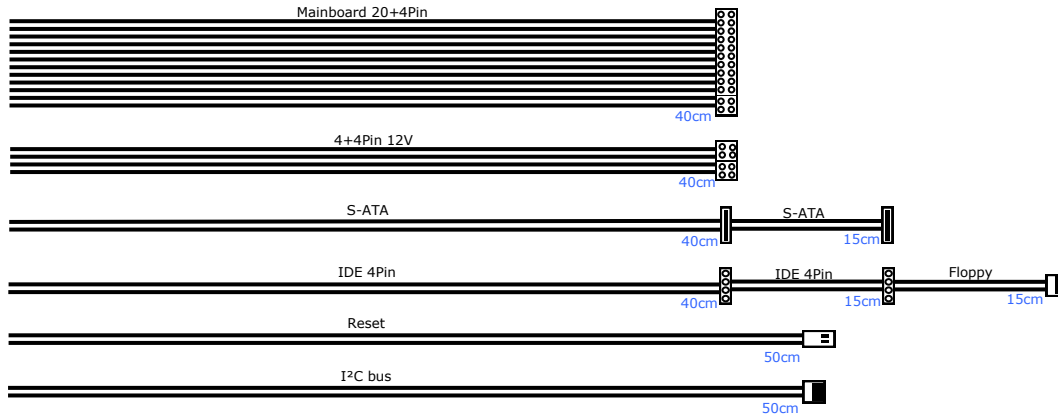


## Specifications

Output	400W
Mainboard 24Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	-/•/-
PCI-Express 6+2Pin	-
PCI-Express 6Pin	-
IDE 4Pin	2x
S-ATA	2x
Floppy	1x
Fan Monitoring	-
115/230V Input	•/• (auto.)
Output	Active
Fan Dimensions	2x 40mm
Fan Control	Auto.
Redundant	•
Protection Circuit	OVP, SCP, OPP, OCP, OTP
MBTF	Average 100000 h
Operating Temperatur	0 to 50°C
Storage Temperatur	-40 to 70°C
PSU Dimensions (H/W/D)	41/122/245mm
Weight (net)	1.90kg
Weight (gross)	2.18kg
Packing Units (VE/VPE)	1/6
Warranty	36 Months
Article Number	99997245
EAN-Code	4260455643504
Features	Bicoloured LED status display per module Acoustic and visual alarm for module and fan Cable for reset I <sup>2</sup> C bus (PMBus compatible) for error signaling and transmission of voltages and currents to compatible backplanes or motherboards
80+ Certificate	

• = existing  
- = non existing

## Connectors



## Efficiency (min.)

PFC from 10% Last <0.8, to 20% Last <0.9	Full Load (100%)	Typical Load (50%)	Light Load (20%)
115VAC	88%	91%	87%
230VAC	89%	93%	88%

AC INPUT	VOLTAGE		CURRENT			FREQUENCY
		100-240V		6.3A Max.		
DC INPUT	145V-350V		6.3A Max.			/
DC OUTPUT	+5V	+3.3V	+12V	-12V	+5Vsb	Max. 400W
	18A	18A	33A	0,5A	3A	
Attention: +5V & +3.3V combined max. 110W						